

PART OF
THE FLEX SYSTEM

X-BLOCK

The X-block can assist you in adding one cable to an an existing duct with two cables inside.

Fixed 40 and 50 mm connection

The X-block is made with a fixed 40 mm connection at one end and a fixed 50 mm connection at the opposite end. This means it can be freely reversed and connected to 40 mm and 50 mm existing ducts in the ground.

Surface treated aluminium

The X-block can withstand air/water pressure up to 25 bar.

Uses the same cable sealings as the rest of the Fremco machines


SPECIFICATIONS

Item No.:	103-10352
Pressure resistance:	Max. 25 bar
Length:	220 mm
Width:	160 mm
Height:	80 mm
Weight:	6.5 kg

DON'T FORGET TO ORDER

Cable seals

Different variants in sizes between 4-25 mm

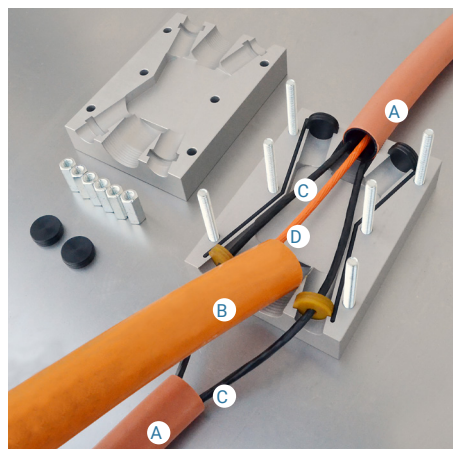

- A) 40 mm existing duct
- B) 50 mm supply duct from PowerFlow RAPID or MultiFlow RAPID
- C) Existing cable
- D) New cable

