

X-BLOCK

The X-block can assist you in adding one cable to an existing duct with two cables inside.

Fixed 40 and 50 mm connection

The X-block is made with a fixed 40 mm connection at one end and a fixed 50 mm connection at the opposite end. This means it can be freely reversed and connected to 40 mm and 50 mm existing ducts in the ground.

Surface treated aluminium

The X-block can withstand air/water pressure up to 25 bar (362 psi).

Uses the same cable sealings as the rest of the Fremco machines


DON'T FORGET TO ORDER

Cable seals

Different variants in sizes between 4-25 mm

SPECIFICATIONS

Item No.:	103-10352
Pressure resistance:	Max. 25 bar (362 psi)
Length:	220 mm (8.6")
Width:	160 mm (6.3")
Height:	80 mm (3.1")
Weight:	6.5 kg (14.3 lbs)

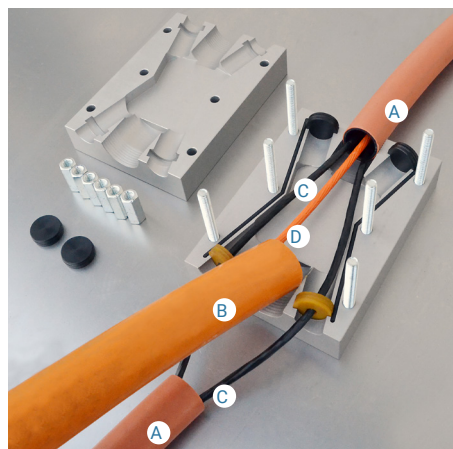

- A) 40 mm existing duct
- B) 50 mm supply duct from PowerFlow RAPID or MultiFlow RAPID
- C) Existing cable
- D) New cable

